NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
Sweden
T +46(0)8 735 55 40
info@nvc-lighting.se

DATASHEET

AMARILLO

Amarillo 7-12-17W LED 290mm Dia MW 830-840


IP54 Decorative LED Bulkhead
PC Construction And PC Opal Diffuser
Easy To Install




GENERAL INFORMATION	
Product Code	NAM/7-12-17/MW/830-840
Product Range	Amenity
Product Category	Amenity
IP Rating	54
IK Rating	07
Warranty	7 Years
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=Ø290, H=N/A
Dimensions Square/Rectangular (L x W x H) (mm)	L=0, W=0, H=58
Cut-out Size (mm)	0
Product Weight (Kg)	1.5
CONSTRUCTION	
Body Material	PC
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	4x2x2.5mm sq. Push In Terminal
Driver - Intergal or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inlc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	D
Luminaire Lumens (lm)	806 / 1356 / 1816
Power Consumption (W)	7 / 12 / 17
LED Lumens (lm/W)	N/A
Efficacy (l.lm/c.W)	114
Operating Temp. (Min/Max)	-20 40
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	3000 - 4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L80 100000
SDCM	<3
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50/60Hz
In Rush	<25A
Drivers per MCB*	N/A
Class	Class 1
Power Factor	0.96
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	Yes
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5056673228079
E NUMBER	7028933
S NUMBER	4126375

* GUIDE ONLY

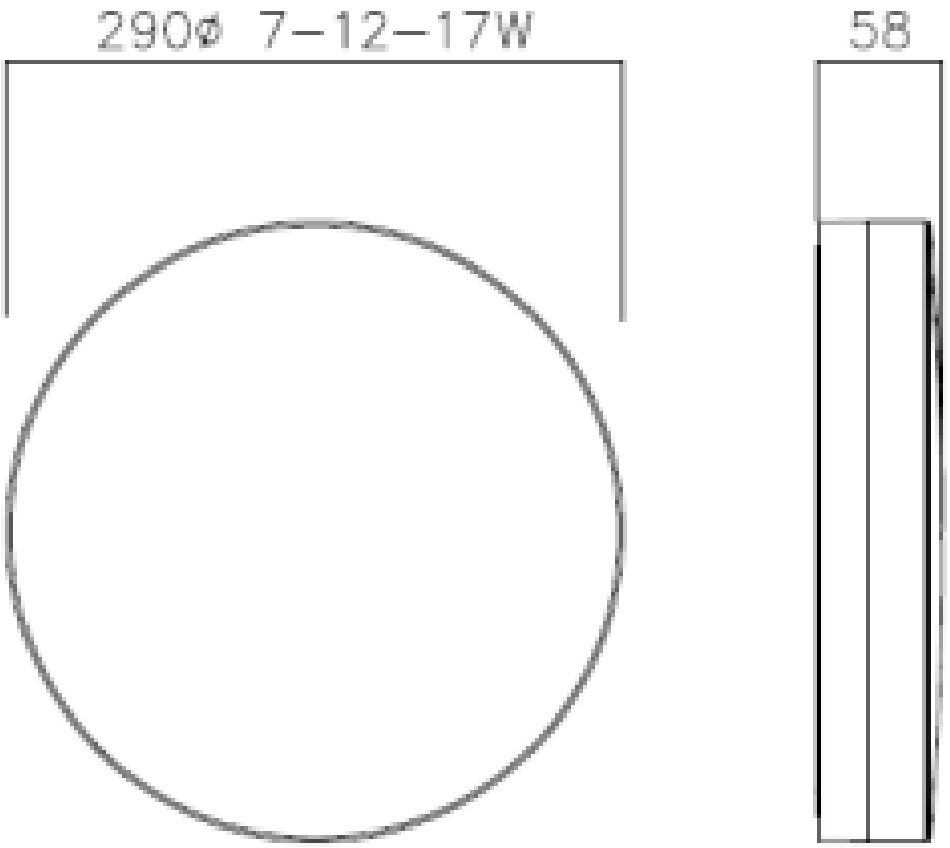

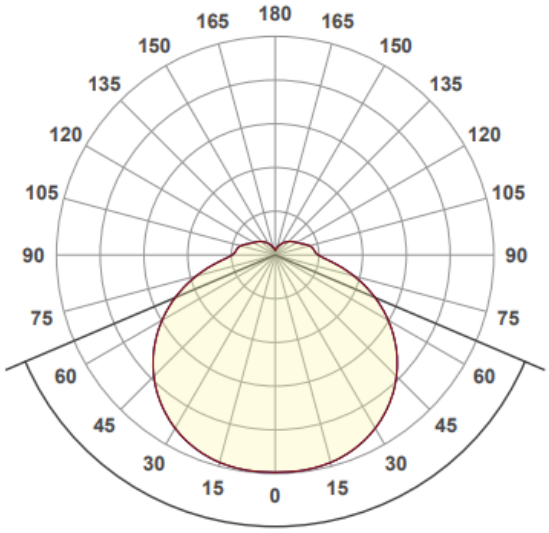

Beam angle **133.8°**

ISO 9001 FS 690066 ISO 14001 EMS 716023 ISO 45001 OHS 716024 ECA REGISTERED MEMBER EDA FORS FLEET OPERATOR RECOGNITION SCHEME ID:012687 RELUX official member

generated by NVC UK PIM v1.7